




Casters and Wheels

Special Variants

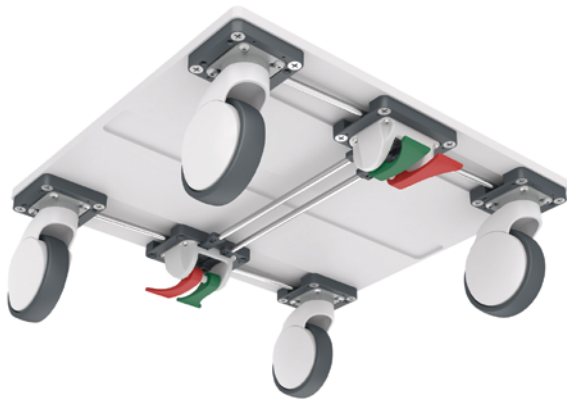

Central Locking System

Modular. Flexible. Individually Configurable.



Single-sided and double-sided cable deflector

Protects. Cables. Hoses. Wires.

Central Locking Single Wheel Casters for Hospital Beds and Medical Equipment



SERIES898W/899W
Durable. Ergonomic. Performance.



SERIES870/878/879
Innovative. Safe. Economical.



SERIES888/889
Functional. Compact. Clean Design.

Twin Wheel Casters



SERIES550 – 554

- Wheel-Ø: 65 mm • 75 mm • 100 mm • 125 mm • 150 mm
- Non-marking polyurethane tires (TPU)
- Optional: conductive version



SERIES551D

- Wheel-Ø: 125 mm
- Non-marking polyurethane tires (TPU)
- Brake pedals in leading and trailing positions
- Optional: conductive version



SERIES570 – 572

- Wheel-Ø: 100 mm • 125 mm
- Non-marking polyurethane tires (TPU)
- Bolt hole design: simplified mounting with socket screw
- Optional: conductive version



SERIES590 / 590V

- Wheel-Ø: 100 mm
- Non-marking polyurethane tires (TPU)
- SERIES590 caster for hydraulic floor lock
- SERIES590V caster with electronic floor lock
- Optional: conductive version



SERIES557(H)

- Wheel-Ø: 125 mm • 150 mm
- Non-marking polyurethane tires (TPU)
- Dual-function total lock and directional
- Optional: conductive version



SERIES562A

- Wheel-Ø: 150 mm
- Non-marking polyurethane tires (TPU)
- Innovative swivel caster with automatic directional locking
- Simple and intuitive maneuvering in confined spaces
- Optional: conductive version

Central Locking Casters



SERIES558W/559W

- Wheel-Ø: 125 mm • 150 mm; Precision ball bearing
- Optimized swivel behavior (precision ball bearing)
- Non-marking polyurethane tires (TPU)
- Washable (W), optional: conductive version
- High load capacity up to 200 kg (SERIES558X/559X)



SERIES870/878/879

- Wheel-Ø: 125 mm • 150 mm; Single precision ball bearing wheel
- Single precision ball bearing swivel
- Optimized swivel behavior (precision ball bearing)
- Optional: conductive version
- Load capacity up to 135 kg



SERIES568(W)/569(W)

- Wheel-Ø: 100 mm • 125 mm • 150 mm; Precision ball bearing
- Optimized swivel behavior (precision ball bearing)
- Non-marking polyurethane tires (TPU)
- Optional: washable (W) and conductive version



SERIES888/889

- Wheel-Ø: 100 mm • 125 mm; Single precision ball bearing wheel
- Non-marking polyurethane tires (TPU)
- Single precision ball bearing swivel
- Gear interface brake system
- Optional: conductive version
- Load capacity up to 100 kg



SERIES898W/899W

- Wheel-Ø: 125 mm • 150 mm • 200 mm; Dual precision ball bearing wheel
- Dual precision ball bearing swivel
- Non-marking polyurethane tires
- Washable (W)
- Optional: conductive version
- High load capacity up to 160 kg



SERIES555E

- Wheel-Ø: 100 mm
- Optimized swivel behavior (precision ball bearing)
- Non-marking polyurethane tires (TPU)
- Optional: conductive version
- Load capacity 100 kg

Central Locking Casters



SERIES828

- Wheel-Ø: 75 mm
- Double row ball bearing swivel
- Non-marking polyurethane tires (TPU)
- Low mounting height
- Load capacity 90 kg



SERIES328

- Wheel-Ø: 50 mm
- Double row ball bearing swivel
- Non-marking polyurethane tires (TPU)
- Load capacity 90 kg



Further central locking single and twin castors with different mountings available.

Contact our sales team!

Learn more:



Nylon Single Wheel Casters



SERIES880(R) – 882(R)

- Wheel-Ø: 100 mm • 125 mm
- Non-marking polyurethane tires (TPU)
- Gear interface brake system
- Optional: conductive version
- Optional: stainless steel version (R)



SERIES840(R) – 847(R)

- Wheel-Ø: 75 mm • 100 mm • 125 mm
- Non-marking thermoplastic rubber tires (TPE)
- Optional: conductive version
- Optional: stainless steel version (R)

Steel Casters



SERIES330(R) / 331(R)

- Wheel-Ø: 100 mm • 125 mm
- Non-marking thermoplastic rubber tires (TPE)
- Optional: conductive version
- Optional: stainless steel version (R)



SERIES320 / 321

- Wheel-Ø: 50 mm • 75 mm
- Non-marking thermoplastic rubber tires (TPE)
- Optional: conductive version



SERIES315 / 316

- Wheel-Ø: 50 mm • 75 mm • 100 mm
- Non-marking thermoplastic rubber tires (TPE)
- Optional: conductive version

Category	Series	Wheel-Ø	Load Capacity (kg)	Hospital and Care Beds	Medical Devices	Operating Tables
Steel Casters						
Single Wheel	315/316	50–100	40–70 kg	---	✓	---
	330/331	100–125	90–100 kg	---	✓	---
Twin Wheel	320/321	50–75	55–90 kg	---	✓	---
Nylon Casters						
Single Wheel	840/841/ 842/844/847	75–125	60–100 kg	✓	✓	---
	880/881/882	100–125	90–100 kg	✓	✓	---
Twin Wheel	550/551/552/554	65–150	70–130 kg	✓	✓	---
	551D	125	130 kg	✓	✓	---
	557(H)	125–150	130 kg	✓	✓	---
	550H/551H	125	130–150 kg	✓	✓	---
	560	100	100 kg	✓	---	---
	570/571/572	100–125	100–130 kg	✓	✓	---
Stainless Steel						
Stainless Steel	330R/331R	100–125	90–100 kg	✓	✓	---
	840R/841R/844R	100–125	90–100 kg	✓	✓	---
	880R/881R/882R	100–125	90–100 kg	✓	✓	---
Central Locking Casters						
Single Wheel	888/889	100–125	90–100 kg	✓	✓	---
	898W/899W	125–200	160 kg	✓	✓	✓
	870/878/879	125–150	135 kg	✓	✓	✓
Twin Wheel	558W/559W	125–150	150–160 kg	✓	✓	✓
	568(W)/569(W)	100–150	150–160 kg	✓	✓	✓
	558X/559X	150	200 kg	✓	✓	✓
	555E	100	100 kg	✓	✓	---
	828	75	90 kg	✓	✓	---
	328	50	90 kg	✓	✓	---
Special solutions	590/590V	100	300 kg	---	---	✓
	562A	150	150 kg	✓	---	---

