


Special Variants

Central Locking System
Modular. Flexible. Individually Configurable.



Single-sided and double-sided cable deflector
Protects. Cables. Hoses. Wires.

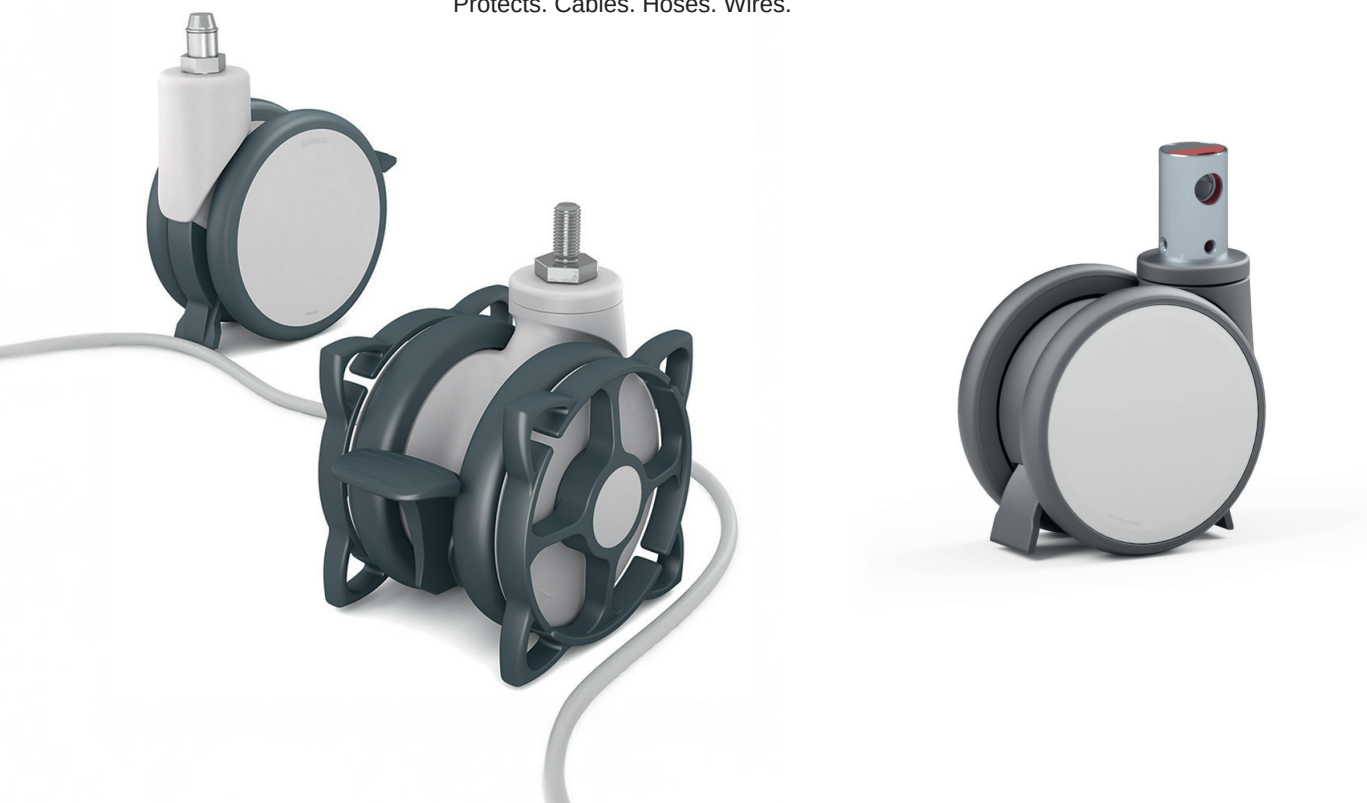

Technical Data

Category	Series	Wheel ø	kg	Hospital and Care Beds	Medical Devices	Operating Tables
Steel Casters						
Single Wheel	315/316	50-100	40-70 kg	---	✓	---
	330/331	100-125	90-100 kg	---	✓	---
Twin Wheel	320/321	50-75	55-90 kg	---	✓	---
Nylon Casters						
Single Wheel	840/841/842/844/847	75-125	60-100 kg	✓	✓	---
	880/881/882	100-125	90-100 kg	✓	✓	---
Twin Wheel	550/551/552/554	65-150	70-110 kg	✓	✓	---
	551D	125	110 kg	✓	✓	---
	557(h)	125-150	110 kg	✓	✓	---
	550H/551H	125-150	110 kg	✓	✓	---
	560	100	100 kg	✓	---	---
	570/571/572	100-125	100-110 kg	✓	✓	---
Stainless Steel						
Stainless Steel	330R/331R	100-125	90-100 kg	✓	✓	---
	840R/841R/844R	100-125	90-100 kg	✓	✓	---
	880R/881R/882R	100-125	90-100 kg	✓	✓	---
Central Locking Casters						
Single Wheel	888/889	100-125	90-100 kg	✓	✓	---
	898W/899W	125-200	160 kg	✓	✓	✓
	870/878/879	125-150	135 kg	✓	✓	✓
Twin Wheel	558(W)/559(W)	125-150	150-160 kg	✓	✓	✓
	568(W)/569(W)	100-150	150-160 kg	✓	✓	✓
	558X/559X	150	200 kg	✓	✓	✓
	555	100	100 kg	✓	✓	---
	828	75	90 kg	✓	✓	---
	328	50	90 kg	✓	✓	---
Special solutions	590/590V	100	300 kg	---	---	✓

STEINCO Paul vom Stein GmbH
Albert-Einstein-Str. 4
42929 Wermelskirchen
Germany

info@steinco.com
www.steinco.com
Phone: +49 2196 943-0



Central Locking Single Wheel Casters for Hospital Beds and Medical Equipment

SERIES898W/899W
Durable. Ergonomic. Performance.



SERIES870/878/879
Innovative. Safe. Economical.



SERIES888/889
Functional. Compact. Clean Design.



Casters and Wheels



Twin Wheel Casters



SERIES550 - 554

- Wheel ø 65 mm, 75 mm, 100 mm, 125 mm and 150 mm
- Non-marking polyurethane tires (TPU)
- Optional: conductive version



SERIES570 - 572

- Wheel ø 100 mm, 125 mm
- Non-marking polyurethane tires (TPU)
- Bolt hole design: simplified mounting with socket screw
- Optional: conductive version



SERIES557 (H)

- Wheel ø 125 mm, 150 mm
- Non-marking polyurethane tires (TPU)
- Dual-function total lock and directional
- Optional: conductive version



SERIES551D

- Wheel ø 125 mm
- Non-marking polyurethane tires (TPU)
- Brake pedals in leading and trailing positions
- Optional: conductive version



SERIES590/590V

- Wheel ø 100 mm
- Non-marking polyurethane tires (TPU)
- **SERIES590 caster** for hydraulic floor lock
- **SERIES590V caster** with electronic floor lock
- Optional: conductive version

Central Locking Casters



SERIES558W/559W

- Wheel ø 125 mm, 150 mm
- Precision ball bearing
- Non-marking polyurethane tires (TPU)
- Optional: washable (W) and conductive version
- High load capacity up to 200 kg (SERIES558X/559X)



SERIES568 (W)/569 (W)

- Low mounting height
- Wheel ø 100 mm, 125 mm, 150 mm
- Precision ball bearing
- Non-marking polyurethane tires (TPU)
- Optional: washable (W) and conductive version
- High load capacity up to 160 kg



SERIES898W/899W

- Wheel ø 125 mm, 150 mm, 200 mm
- Dual precision ball bearing swivel
- Dual precision ball bearing wheel with non-marking polyurethane tires
- washable (W)
- Optional: conductive version
- High load capacity up to 160 kg



SERIES870/878/879

- Wheel ø 125 mm, 150 mm
- Single precision ball bearing wheel with non-marking polyurethane tires
- Single precision ball bearing swivel
- Optional: conductive version
- Load capacity up to 135 kg



SERIES888/899

- Wheel ø 100 mm, 125 mm
- Non-marking polyurethane tires (TPU)
- Single precision ball bearing swivel
- Gear interface brake system
- Optional: conductive version
- Load capacity up to 100 kg

Central Locking Casters



SERIES555

- Wheel ø 100 mm
- Precision ball bearing swivel
- Non-marking polyurethane tires (TPU)
- Optional: conductive version
- Load capacity 100 kg



SERIES828

- Wheel ø 75 mm
- Double row ball bearing swivel
- Non-marking polyurethane tires (TPU)
- Low mounting height
- Load capacity 90 kg



SERIES328

- Wheel ø 50 mm
- Double row ball bearing swivel
- Non-marking polyurethane tires (TPU)
- Load capacity 90 kg



Further central locking single and twin castors with different mountings available.

Contact our sales team!

Learn more:



Nylon Single Wheel Casters



SERIES880 (R) - 882 (R)

- Wheel ø 100 mm, 125 mm
- Non-marking polyurethane tires (TPU)
- Gear interface brake system
- Optional: conductive version
- Optional: stainless steel version (R)



SERIES840 (R) - 847 (R)

- Wheel ø 75 mm, 100 mm, 125 mm
- Non-marking thermoplastic rubber tires (TPE)
- Optional: conductive version
- Optional: stainless steel version (R)

Steel Casters



SERIES330 (R)/331 (R)

- Wheel ø 100 mm, 125 mm
- Non-marking thermoplastic rubber tires (TPE)
- Optional: conductive version
- Optional: stainless steel version (R)



SERIES315/316

- Wheel ø 50 mm, 75 mm, 100 mm
- Non-marking thermoplastic rubber tires (TPE)
- Optional: conductive version



SERIES320/321

- Wheel ø 50 mm, 75 mm
- Non-marking thermoplastic rubber tires (TPE)
- Optional: conductive version